


Line Hardware and Insulator Fittings


TECHNICAL DATA

1. MID SPAN COMPRESSION JOINT SUITABLE FOR ACSR 'LYNX' CONDUCTOR.
2. SLIP STRENGTH : NOT TO LESS THAN 95% OF UTS OF CONDUCTOR.
3. FERROUS PARTS HOT DIP GALVANIZED AS PER BS:729.
4. GENERAL TOLERANCE NOT TO EXCEED $\pm 3\%$.
5. HARDNESS OF STEELE SLEEVE - 160 BHN (MAX).
6. COMPRESSION PRESSURE : 100 TONS (MIN.).
7. ALL DIMENSIONS ARE IN MM..

TITLE: MID SPAN COMPRESSION JOINT FOR ACSR LYNX CONDUCTOR

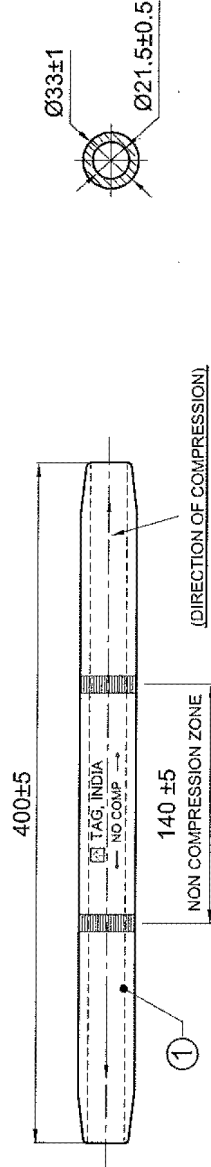

LEFT VIEW

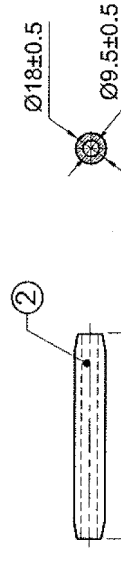

(DIRECTION OF COMPRESSION)

FRONT VIEW


LEFT VIEW

COMP	ALUMINIUM	STEEL
BEFORE		

2	STEEL SLEEVE	MILD STEEL	1	-	UTS.KN.
1	ALUMINIUM SLEEVE	ALUMINIUM	1	-	
S.NO.	DESCRIPTION	MATERIAL	QTY.NOS		

TECHNICAL DATA

1. REPAIR SLEEVE SUITABLE FOR ACSR ' LYNX ' CONDUCTOR.
2. COMPRESSION PRESSURE : 100 TONS (MIN.).
3. GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED IS $\pm 3\%$.
4. ALL DIMENSIONS ARE IN MM.

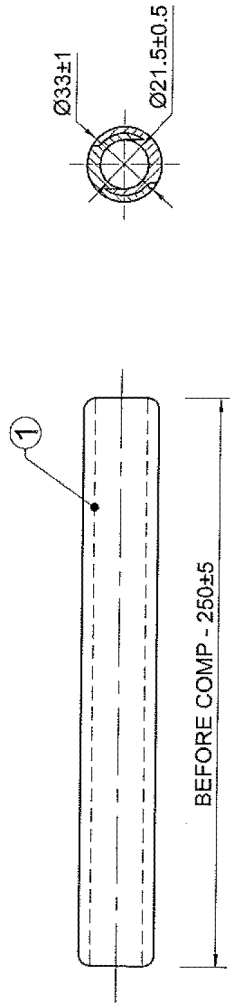

FRONT VIEW

LEFT VIEW

COMP	ALUMINIUM
BEFORE	


TITLE: REPAIR SLEEVE FOR ACSR LYNX CONDUCTOR

S.NO.	ALUMINIUM SLEEVE DESCRIPTION	ALUMINIUM MATERIAL	1 (set)	NO.REQD.	UTS.KN.
1					

TECHNICAL DATA


1. 4R-STOCK BRIDGE DAMPER SUITABLE FOR ACSR 'LYNX' CONDUCTOR.
2. FERROUS PARTS HOT DIP GALVANIZED AS PER BS:729.
3. GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED IS $\pm 3\%$.
4. DAMPER WEIGHT MADE OF CAST IRON AND ATTACHED TO MESSENGER CABLE WITH ALUMINIUM SLEEVE IN TAPERED HOLE COMPRESSED FIT.
5. UTS OF MESSENGER CABLE :135 KG/SQMM.
6. BOLT TIGHTENING TORQUE 6 KGM.
7. MASS PULL OFF - 500 KG (MIN).
8. ALL DIMENSIONS ARE IN MM.

**TITLE: 4R - STOCK BRIDGE VIBRATION DAMPER
SUITABLE FOR ACSR LYNX CONDUCTOR .**

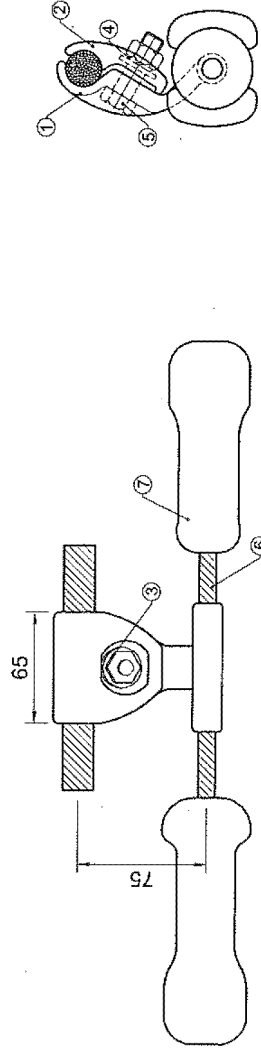

FRONT VIEW

LEFT VIEW

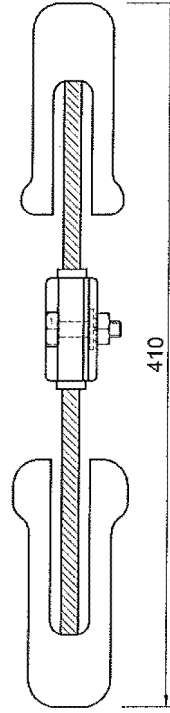


TOP VIEW

S.NO.	DESCRIPTION	MATERIAL	NO.REQD	UTS.KN
7	DAMPER WEIGHT	CAST IRON	1 SET	-
6	MESSENGER CABLE	HIGH STRENGTH STEEL	1	-
5	BOLT (M12 X 40)	MILD STEEL	1	-
4	SPRING WASHER (M12)	SPRING STEEL	1	-
3	FLAT WASHER (M12)	MILD STEEL	1	-
2	KEEPER PIECE	ALUMINIUM ALLOY	1	-
1	CLAMP BODY	ALUMINIUM ALLOY	1	-

TECHNICAL DATA

1. ASSEMBLY MINIMUM ULTIMATE TENSILE STRENGTH - 70 kN.
2. BALL & SOCKET DESIGNATION - 16 MM AS PER IEC-120.
3. BALL & SOCKET LOCKING BY R-CLIP AS PER IEC-372. MADE OF STAINLESS STEEL.
4. FERROUS PARTS-HOT DIP GALVANIZED AS PER BS:729.
5. GENERAL TOLERANCE NOT TO EXCEED $\pm 3\%$.
6. INSULATOR NOT IN TAG'S SCOPE OF SUPPLY..
7. ALL DIMENSIONS ARE IN mm.


TITLE: 132 kV SINGLE SUSPENSION 'I' STRING
FOR SINGLE ACSR LYNX CONDUCTOR

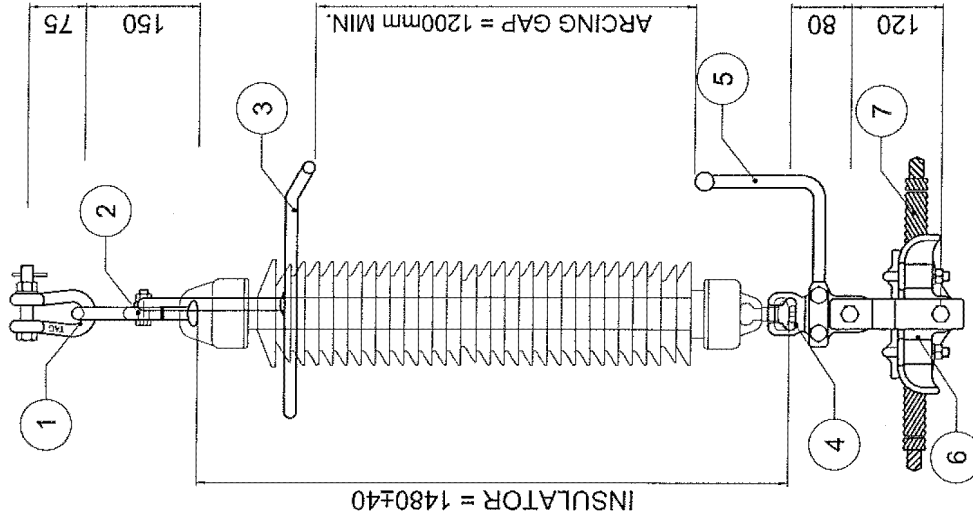

S.NO.	DESCRIPTION	MATERIAL	COMP. DRG.NO.	QTY. (NOS.)	SURFACE TREATMENT
7	P.A. RODS	AL ALLOY	PARTIELYNX	1SET	-
6	SUSPENSION CLAMP / STIRRUP	AL ALLOY / MILD STEEL	SCS/4000	1	- / H.D.G.
5	BALL ARcing HORN	MILD STEEL	BAH/4007	1	H.D.G.
4	SOCKET EYE	FORGED STEEL	SE/3001	1	H.D.G.
3	RING ARcing HORN	MILD STEEL	RAH/4002	1	H.D.G.
2	H.H.BALL LINK	FORGED STEEL	HLB/3001	1	H.D.G.
1	D-SHACKLE	FORGED STEEL	DS/1603	1	H.D.G.

TECHNICAL DATA

1. ASSEMBLY MINIMUM ULTIMATE TENSILE STRENGTH - 70 KN.
2. BALL & SOCKET DESIGNATION - 16 MM AS PER IEC-120.
3. BALL & SOCKET LOCKING BY R-CLIP AS PER IEC-372. MADE OF STAINLESS STEEL.
4. FERROUS PARTS-HOT DIP GALVANIZED AS PER BS:729.
5. GENERAL TOLERANCE NOT TO EXCEED $\pm 3\%$.
6. INSULATOR NOT IN TAG'S SCOPE OF SUPPLY..
7. ALL DIMENSIONS ARE IN mm.

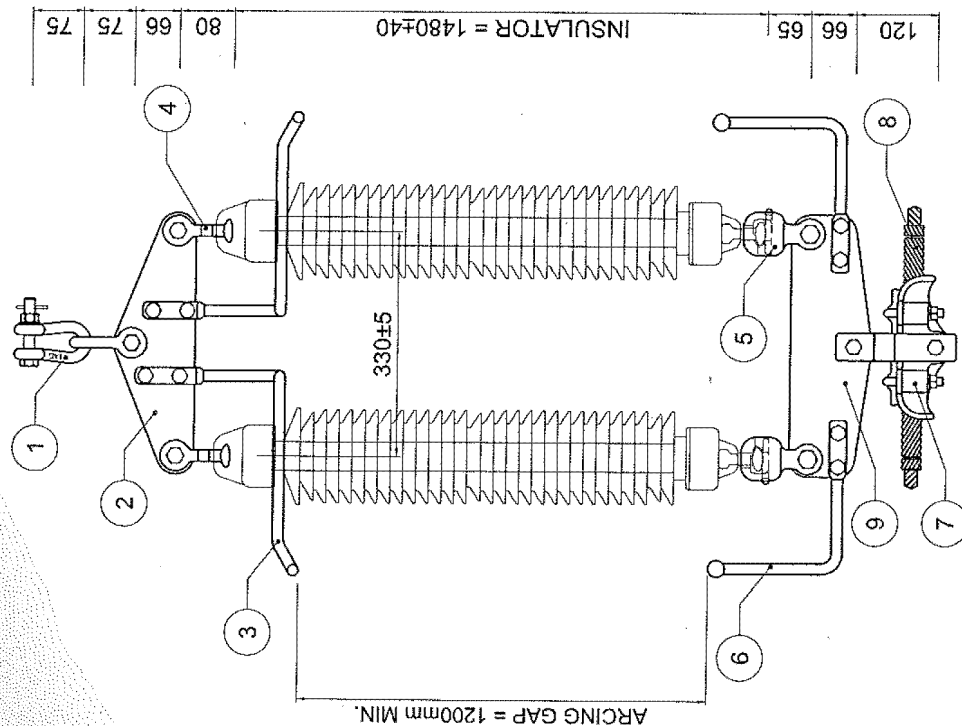


TITLE: 132 kV DOUBLE SUSPENSION 'I' STRING
FOR SINGLE ACSR LYNX CONDUCTOR

S.NO.	DESCRIPTION	MATERIAL	COMP. DRG.NO.	QTY. (NOS.)	SURFACE TREATMENT
9	TRIANGULAR YOKE PLATE	MILD STEEL	TYP/4019	1	H.D.G.
8	P.A. RODS	AL. ALLOY	PARIE/LYNX	1 SET	-
7	SUSPENSION CLAMP / STIRRUP	AL. ALLOY / STEEL	SCS/4000	1	- / H.D.G.
6	BALL / ARCING HORN	MILD STEEL	BAH/4007	2	H.D.G.
5	SOCKET CLEVIS	FORGED STEEL	SC/3001	2	H.D.G.
4	BALL CLEVIS	FORGED STEEL	BC/3001	2	H.D.G.
3	RING ARCING HORN	MILD STEEL	RAH/4004	2	H.D.G.
2	TRIANGULAR YOKE PLATE	MILD STEEL	TYP/4018	1	H.D.G.
1	D - SHACKLE	FORGED STEEL	DS/1603	2	H.D.G.

TECHNICAL DATA :-

1. ASSEMBLY MINIMUM ULTIMATE TENSILE STRENGTH - 100 kN.
2. BALL & SOCKET DESIGNATION - 16 MM AS PER IEC-120.
3. BALL & SOCKET LOCKING BY R-CLIP AS PER IEC-372. MADE OF STAINLESS STEEL.
4. FERROUS PARTS-HOT DIP GALVANIZED AS PER BS:729.
5. GENERAL TOLERANCE NOT TO EXCEED $\pm 3\%$.
6. INSULATOR NOT IN TAG'S SCOPE OF SUPPLY..
7. ALL DIMENSIONS ARE IN mm.

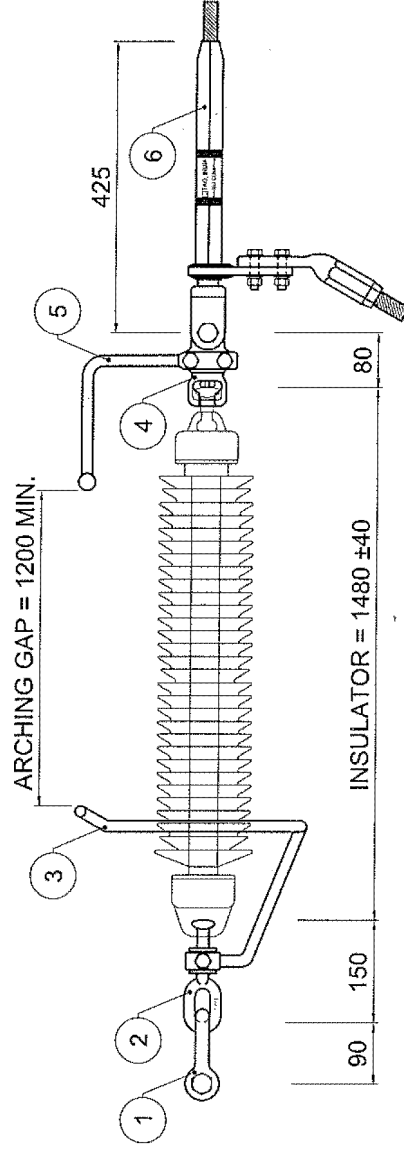


**TITLE: 132 kV SINGLE TENSION STRING
FOR ACSR LYNX CONDUCTOR**

S.NO.	DESCRIPTION	MATERIAL	COMP. DRG.NO.	QTY. (NOS.)	SURFACE TREATMENT
6	DEAD END ASSEMBLY	ALUMINUM / FORGED STEEL	DEA/3104	1	- / H.D.G.
5	BALL ARCHING HORN	MILD STEEL	BAH/4007	1	H.D.G.
4	SOCKET EYE	FORGED STEEL	SE/3002	1	H.D.G.
3	RING ARCHING HORN	MILD STEEL	RAH/4002	1	H.D.G.
2	H.H.BALL LINK	FORGED STEEL	HBL/3001	1	H.D.G.
1	D - SHACKLE	FORGED STEEL	DS/4003	1	H.D.G.

TECHNICAL DATA :-

1. ASSEMBLY MINIMUM ULTIMATE TENSILE STRENGTH - 100 kN.
2. BALL & SOCKET DESIGNATION - 16 MM AS PER IEC-120.
3. BALL & SOCKET LOCKING BY R-CLIP AS PER IEC-372. MADE OF STAINLESS STEEL.
4. FERROUS PARTS-HOT DIP GALVANIZED AS PER BS:729.
5. GENERAL TOLERANCE NOT TO EXCEED $\pm 3\%$.
6. INSULATOR NOT IN TAG'S SCOPE OF SUPPLY..
7. ALL DIMENSIONS ARE IN mm.

TITLE: 132 KV DOUBLE TENSION STRING FOR ACSR LYNX CONDUCTOR

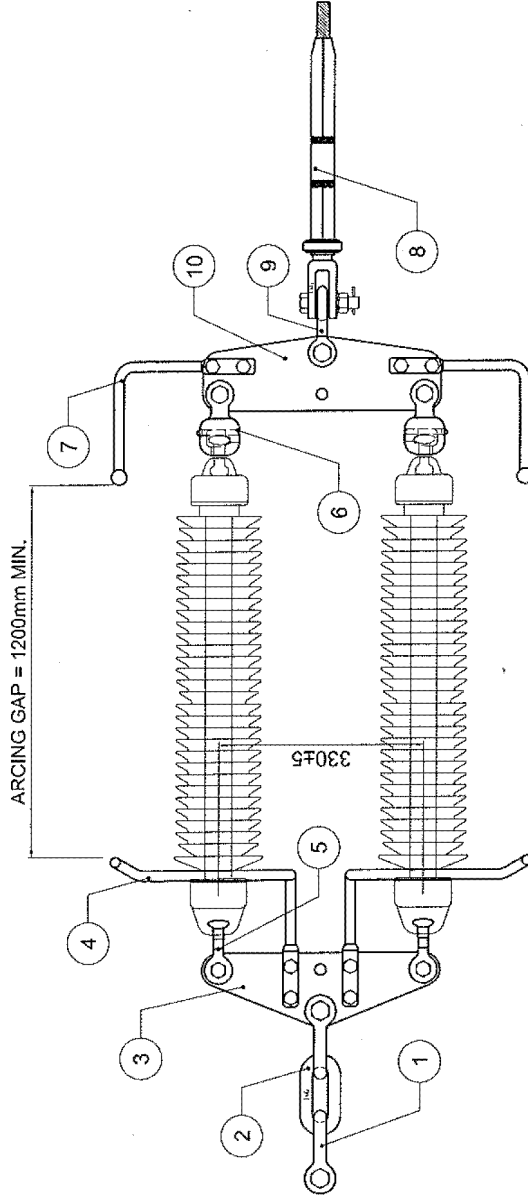


90	90	90	66	80	65	66	80	425
INSULATOR = 1480±40								

S.NO.	DESCRIPTION	MATERIAL	COMP. DRG.NO.	QTY. (NOS.)	SURFACE TREATMENT
10	TRIANGULAR YOKE PLATE	MILD STEEL	TYP/4019	1	H.D.G.
9	CLEVIS EYE	FORGED STEEL	CE/1600	1	H.D.G.
8	DEAD END ASSEMBLY	ALUMINUM / FORGED STEEL	DEA/3103	1	H.D.G.
7	BALL ARCING HORN	MILD STEEL	BAH/4007	2	H.D.G.
6	SOCKET CLEVIS	FORGED STEEL	SC/3001	2	H.D.G.
5	BALL CLEVIS	FORGED STEEL	BC/3001	2	H.D.G.
4	RING ARCING HORN	MILD STEEL	RAH/4004	2	H.D.G.
3	TRIANGULAR YOKE PLATE	MILD STEEL	TYP/4018	1	H.D.G.
2	CHAIN LINK	FORGED STEEL	CL/4100	1	H.D.G.
1	D - SHACKLE	FORGED STEEL	DS/4003	2	H.D.G.

TECHNICAL DATA

1. REPAIR SLEEVE SUITABLE FOR ACSR ' LYNX ' CONDUCTOR.
2. COMPRESSION PRESSURE : 100 TONS (MIN.).
3. GENERAL TOLERANCE UNLESS OTHERWISE SPECIFIED IS $\pm 3\%$.
4. ALL DIMENSIONS ARE IN MM.

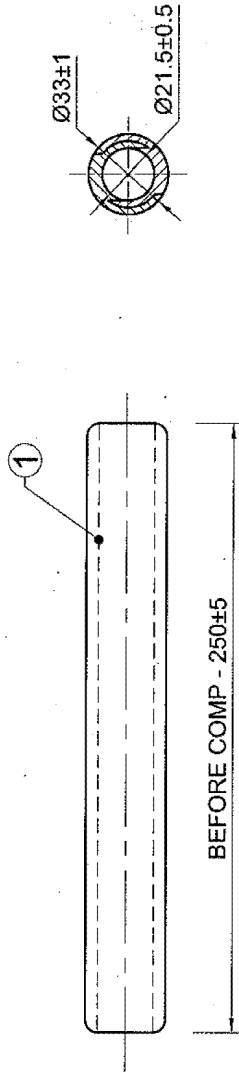

FRONT VIEW

LEFT VIEW

COMP	ALUMINIUM
BEFORE	
AFTER	


TITLE: REPAIR SLEEVE FOR
ACSR LYNX CONDUCTOR

1	ALUMINIUM SLEEVE	ALUMINIUM	1 (set)	-
S.NO.	DESCRIPTION	MATERIAL	NO.REQD.	UTS.KN.


TECHNICAL DATA

- 1. MID SPAN COMPRESSION JOINT SUITABLE FOR ACSR ' LYNX ' CONDUCTOR.
- 2. SLIP STRENGTH : NOT TO LESS THAN 95% OF UTS OF CONDUCTOR.
- 3. FERROUS PARTS HOT DIP GALVANIZED AS PER BS:729.
- 4. GENERAL TOLERANCE NOT TO EXCEED $\pm 3\%$.
- 5. HARDNESS OF STEELE SLEEVE - 160 BHN (MAX).
- 6. COMPRESSION PRESSURE : 100 TONS (MIN.).
- 7. ALL DIMENSIONS ARE IN MM..

TITLE: MID SPAN COMPRESSION JOINT FOR ACSR LYNX CONDUCTOR

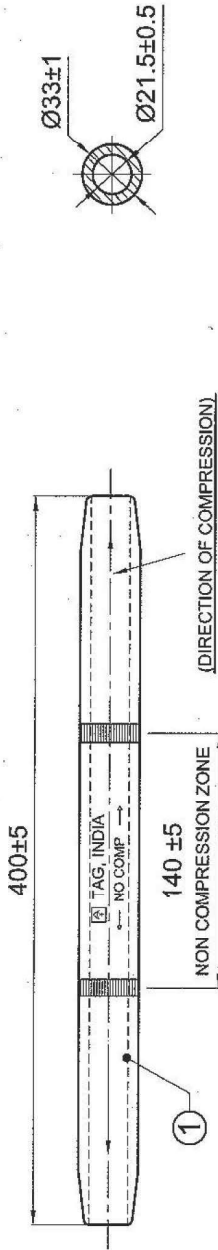

LEFT VIEW

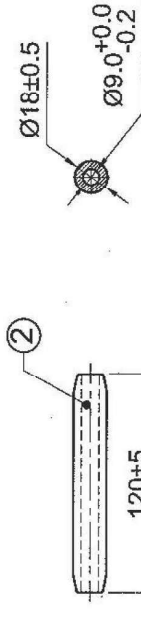

LEFT VIEW

COMP	ALUMINIUM	STEEL
BEFORE		
AFTER		

2	STEEL SLEEVE	M.S	1	
1	ALUMINIUM SLEEVE	ALUMINIUM ALLOY	1	
S.NO.	DESCRIPTION	MATERIAL	QTY.NOS	UTS.KN.

OPGW

and

OPGW

Line fittings

ENGINE NO. 17388 IN DEAD-END AT PASS TENSION TOWER



- NO SCALE

[illegible]

TITLE:	FIBERGLIN DEAD-END CABLE DIAMETER RANGE: 11.5-12.8mm (FOR LHL OPCW)
PART NUMBER:	28900002-EN

DRAWN BY		DATE		APPROVED BY		REVISION	0
CHECKED BY							

DWG. NO. _____

FIBERLIN DEAD-END AT PASS TENSION TOWER


ITEM	QTY.	DESCRIPTION	REF. NO.	MATERIAL	UNIT
6	2	U SHACKLE			
5	-	GROUNDING WIRE	GWA-95-201	ALUMINUM	0.7
4	-	PARALLEL CLAMP	JB-2	ALUMINUM ALLOY	0.4
3	2	EXTENSION LINK	EB-7-B	GALV. STEEL	0.5
2	2	THIMBLE CLEVIS	TCB-7-B	GALV. STEEL	0.5
1B	-	DEAD-END RODS	2891002	AL.-CLAD STEEL	0.9
1A	-	STRUCTURAL REINFORCING RODS	2892002	AL.-CLAD STEEL	0.8
1	2	DEAD-END ASSEMBLY	2890002		

MARK OF DEAD END IS RED;
DIMENSION $\leq 100\text{mm}$, $\pm 3\text{mm}$
DIMENSION $> 100\text{mm}$, $\pm 4\%$.






I	L	3	4	5	6	7	8																											
ALL DIMENSIONS IN MILLIMETERS																																		
DWG. NO. 2891002-EN																																		
<div><div></div><div><p>990</p></div></div>																																		
<div><div>NO SCALE</div><div><table><tr><td>REV. NO.</td><td>1</td><td>2</td><td>3</td><td>4</td><td>5</td><td>6</td><td>7</td><td>8</td></tr><tr><td>REVISION</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>DATE</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table></div><div><div>1. REFERENCE STANDARD IEC-61284.</div><div>2. MATERIAL: ALUMINIUM-CLAD STEEL.</div><div>3. ROD DIA. IS 3.2mm. TOTAL 8 RODS.</div><div>4. WEIGHT: 0.9kg.</div><div>5. COLOR CODE IS RED.</div><div>6. LAYER DIRECTION: LEFT HAND.</div><div>7. CLAMP FIT FOR 11.5-12.8mm OPGW.</div></div></div>								REV. NO.	1	2	3	4	5	6	7	8	REVISION									DATE								
REV. NO.	1	2	3	4	5	6	7	8																										
REVISION																																		
DATE																																		
<div><div><div>TITLE: DEAD-END RODS</div><div>PART NUMBER: 2891002</div></div><div><div>DRAWN BY</div><div>CHECKED BY</div><div>APPROVED BY</div><div>REVISION</div></div><div><div>DWG. NO. 2891002-EN</div><div>REV. 20140110</div><div>SIGNATURE & DATE</div></div></div>																																		




ALL DIMENSIONS IN MILLIMETERS									
I	Z	3	4	5	6	7	8	2892002-EN	
1370									
									
NOTE:									
1. REFERENCE STANDARD IEC-61284.									
2. MATERIAL: ALUMINIUM-CLAD STEEL.									
3. ROD DIA. IS 2.9MM. TOTAL 13 RODS.									
4. WEIGHT: 0.8kg.									
5. COLOR CODE IS RED.									
6. LAYER DIRECTION: RIGHT HAND.									
7. CLAMP FIT FOR 11.5-12.8mm OPGW.									
NO SCALE									
STRUCTURAL REINFORCING RODS									
PART NUMBER: 2892002									
DRAWN BY: []									
CHECKED BY: []									
APPROVED BY: []									
REVISION: []									
DATE: 20140110									
SIGNATURE: []									
2892002-EN									

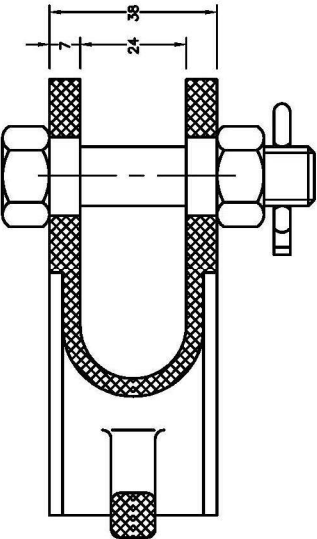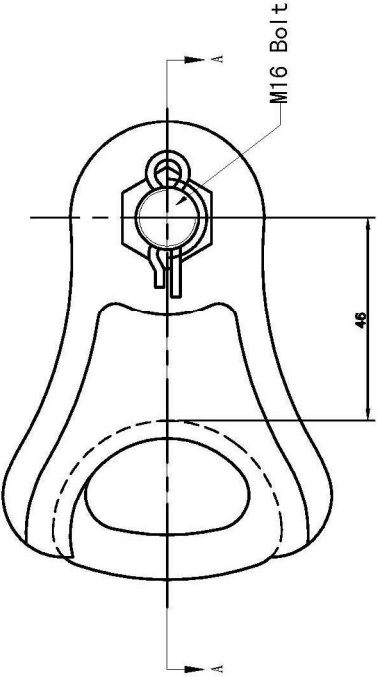


1		2		3		4		5		6		7		8					
ALL DIMENSIONS IN MILLIMETERS												DRAW. NO. TCB-7-B							
<div></div>																			
NOTE:																			
<div>1. BODY MATERIAL: GAL. STEEL; BOLT & NUT MATERIAL: GAL. STEEL; COTTER PIN MATERIAL: STAINLESS STEEL.</div> <div>2. THE ULTIMATE BREAK STRENGTH IS 70KN.</div> <div>3. WEIGHT: 0.5kg.</div> <div>4. DIMENSION TOLERANCE: $< 50\text{mm} \pm 2\text{mm}$, $\geq 50\text{mm} \pm 4\%$.</div>																			
NO SCALE																			
TITLE: THIMBLE CLEVIS												DRAWN BY: []		CHECKED BY: []		DATE: []		REVISION: []	
PART NUMBER: TCB-7-B												DRAW. NO. TCB-7-B							
1		2		3		4		5		6		7		8					



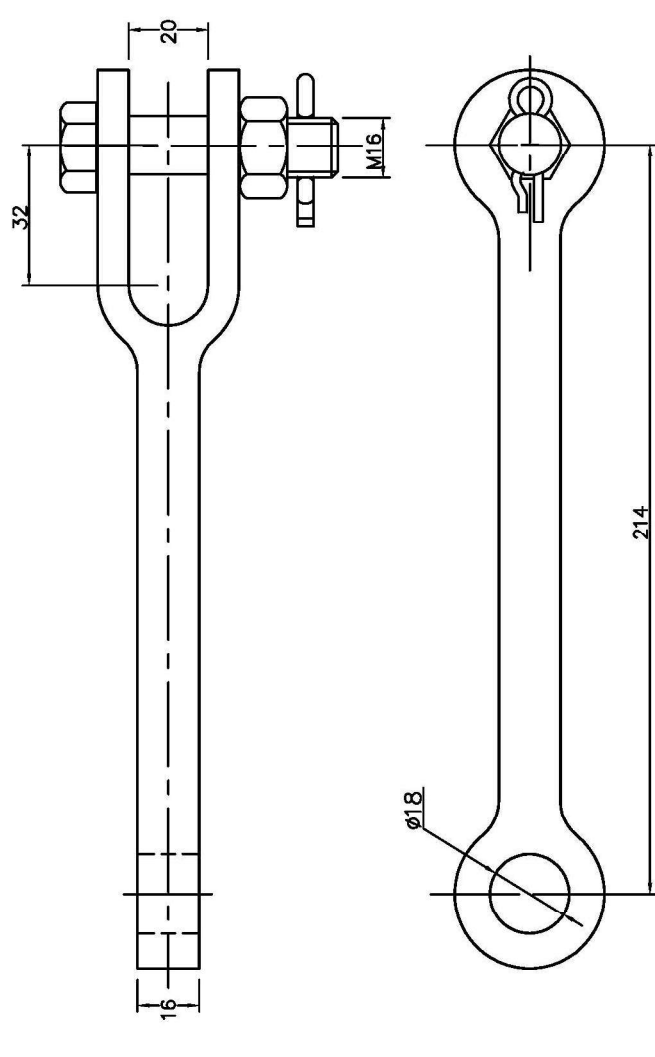I		Z		3		4		3		0		I		0		F																																																							
ALL DIMENSIONS IN MILLIMETERS																DRAWING NO. EB-7-B-EN																																																							
<div></div>																																																																							
<p>NOTE:</p> <ul style="list-style-type: none">1. BODY MATERIAL: GAL. STEEL; BOLT & NUT MATERIAL: GAL. STEEL; COTTER PIN MATERIAL: STAINLESS STEEL.2. THE ULTIMATE BREAK STRENGTH IS 70KN.3. WEIGHT: 0.5kg.4. DIMENSION TOLERANCE: $< 50\text{mm} \pm 2\text{mm}$, $\geq 50\text{mm} \pm 4\%$.																																																																							
NO SCALE																																																																							
<table border="1"><thead><tr><th colspan="2">REVISION</th><th colspan="2">REVISION</th><th colspan="2">REVISION</th><th colspan="2">REVISION</th><th colspan="2">REVISION</th><th colspan="2">REVISION</th><th colspan="2">REVISION</th><th colspan="2">REVISION</th><th colspan="2">REVISION</th></tr><tr><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th><th>NO.</th><th>DATE</th></tr></thead><tbody><tr><td>1</td><td>2017/01/05</td><td>2</td><td></td><td>3</td><td></td><td>4</td><td></td><td>5</td><td></td><td>6</td><td></td><td>7</td><td></td><td>8</td><td></td><td>9</td><td></td></tr></tbody></table>																		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	1	2017/01/05	2		3		4		5		6		7		8		9	
REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION																																																							
NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE	NO.	DATE																																																						
1	2017/01/05	2		3		4		5		6		7		8		9																																																							
<table border="1"><tr><td colspan="12">TITLE: Extension link</td><td colspan="2">DRAWN BY: []</td><td colspan="2">CHECKED BY: []</td><td colspan="2">DATE: []</td><td colspan="2">APPROVED BY: []</td><td colspan="2">REVISION: []</td></tr><tr><td colspan="12">PART NUMBER: EB-7-B</td><td colspan="2">DRAWING NO. EB-7-B-EN</td><td colspan="2"></td><td colspan="2"></td><td colspan="2"></td></tr></table>																		TITLE: Extension link												DRAWN BY: []		CHECKED BY: []		DATE: []		APPROVED BY: []		REVISION: []		PART NUMBER: EB-7-B												DRAWING NO. EB-7-B-EN																			
TITLE: Extension link												DRAWN BY: []		CHECKED BY: []		DATE: []		APPROVED BY: []		REVISION: []																																																			
PART NUMBER: EB-7-B												DRAWING NO. EB-7-B-EN																																																											

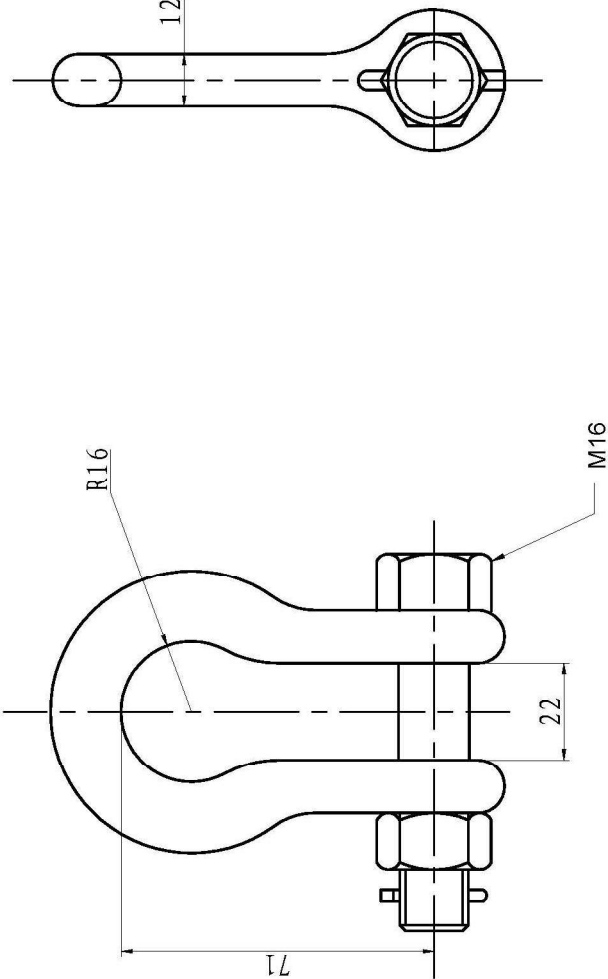

1		2		3		4		5		6		7		8																																																																																																																	
ALL DIMENSIONS IN MILLIMETERS																																																																																																																															
AS-7-SS-EN																																																																																																																															
<div></div>																																																																																																																															
<p>NOTE:</p> <ul style="list-style-type: none">1. BODY MATERIAL: CAL. STEEL; BOLT, NUT & COTTER PIN MATERIAL: STAINLESS STEEL.2. THE ULTIMATE BREAK STRENGTH IS 70KN.3. WEIGHT: 0.5kg.4. DIMENSION TOLERANCE: $<50\text{mm} \pm 2\text{mm}$, $\geq 50\text{mm} \pm 4\%$.																																																																																																																															
NO SCALE																																																																																																																															
<table border="1"><tr><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td></tr><tr><td colspan="2">NO.</td><td colspan="2">NO.</td><td colspan="2">NO.</td><td colspan="2">NO.</td><td colspan="2">NO.</td><td colspan="2">NO.</td><td colspan="2">NO.</td><td colspan="2">NO.</td></tr><tr><td colspan="2">0</td><td colspan="2">1</td><td colspan="2">2</td><td colspan="2">3</td><td colspan="2">4</td><td colspan="2">5</td><td colspan="2">6</td><td colspan="2">7</td></tr><tr><td colspan="2">FIRST ISSUE</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td></tr><tr><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td></tr><tr><td colspan="2">Rev. 20140113</td><td colspan="2">Rev. 20140113</td><td colspan="2">Rev. 20140113</td><td colspan="2">Rev. 20140113</td><td colspan="2">Rev. 20140113</td><td colspan="2">Rev. 20140113</td><td colspan="2">Rev. 20140113</td><td colspan="2">Rev. 20140113</td></tr><tr><td colspan="2">SIGNATURE</td><td colspan="2">SIGNATURE</td><td colspan="2">SIGNATURE</td><td colspan="2">SIGNATURE</td><td colspan="2">SIGNATURE</td><td colspan="2">SIGNATURE</td><td colspan="2">SIGNATURE</td><td colspan="2">SIGNATURE</td></tr></table>																REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		NO.		NO.		NO.		NO.		NO.		NO.		NO.		NO.		0		1		2		3		4		5		6		7		FIRST ISSUE		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		DATE		DATE		DATE		DATE		DATE		DATE		DATE		DATE		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE	
REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION																																																																																																																	
NO.		NO.		NO.		NO.		NO.		NO.		NO.		NO.																																																																																																																	
0		1		2		3		4		5		6		7																																																																																																																	
FIRST ISSUE		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION																																																																																																																	
DATE		DATE		DATE		DATE		DATE		DATE		DATE		DATE																																																																																																																	
Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113		Rev. 20140113																																																																																																																	
SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE		SIGNATURE																																																																																																																	
<table border="1"><tr><td colspan="2">TITLE</td><td colspan="2">U SHACKLE</td><td colspan="2">AS-7-SS</td><td colspan="2">AS-7-SS-EN</td><td colspan="2">AS-7-SS-EN</td><td colspan="2">AS-7-SS-EN</td><td colspan="2">AS-7-SS-EN</td><td colspan="2">AS-7-SS-EN</td></tr><tr><td colspan="2">PART NUMBER</td><td colspan="2">AS-7-SS</td><td colspan="2">AS-7-SS</td><td colspan="2">AS-7-SS</td><td colspan="2">AS-7-SS</td><td colspan="2">AS-7-SS</td><td colspan="2">AS-7-SS</td><td colspan="2">AS-7-SS</td></tr><tr><td colspan="2">DRAWN BY</td><td colspan="2">CHECKED BY</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td><td colspan="2">DATE</td></tr><tr><td colspan="2">APPROVED BY</td><td colspan="2">APPROVED BY</td><td colspan="2">APPROVED BY</td><td colspan="2">APPROVED BY</td><td colspan="2">APPROVED BY</td><td colspan="2">APPROVED BY</td><td colspan="2">APPROVED BY</td><td colspan="2">APPROVED BY</td></tr><tr><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td><td colspan="2">REVISION</td></tr><tr><td colspan="2">G</td><td colspan="2">G</td><td colspan="2">G</td><td colspan="2">G</td><td colspan="2">G</td><td colspan="2">G</td><td colspan="2">G</td><td colspan="2">G</td></tr></table>																TITLE		U SHACKLE		AS-7-SS		AS-7-SS-EN		AS-7-SS-EN		AS-7-SS-EN		AS-7-SS-EN		AS-7-SS-EN		PART NUMBER		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS		DRAWN BY		CHECKED BY		DATE		DATE		DATE		DATE		DATE		DATE		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		G		G		G		G		G		G		G		G																	
TITLE		U SHACKLE		AS-7-SS		AS-7-SS-EN		AS-7-SS-EN		AS-7-SS-EN		AS-7-SS-EN		AS-7-SS-EN																																																																																																																	
PART NUMBER		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS		AS-7-SS																																																																																																																	
DRAWN BY		CHECKED BY		DATE		DATE		DATE		DATE		DATE		DATE																																																																																																																	
APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY		APPROVED BY																																																																																																																	
REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION		REVISION																																																																																																																	
G		G		G		G		G		G		G		G																																																																																																																	

[illegible]

[illegible]



ALL DIMENSIONS IN MILLIMETERS										I		J		K		L		M		N		O		P		Q		R		S		T		U		V		W		X		Y		Z		AA		AB		AC		AD		AE		AF		AG		AH		AI		AJ		AK		AL		AM		AN		AO		AP		AQ		AR		AS		AT		AU		AV		AW		AX		AY		AZ		BA		BB		BC		BD		BE		BF		BG		BH		BI		BJ		BK		BL		BM		BN		BO		BP		BQ		BR		BS		BT		BU		BV		BW		BX		BY		BZ		CA		CB		CC		CD		CE		CF		CG		CH		CI		CJ		CK		CL		CM		CN		CO		CP		CQ		CR		CS		CT		CU		CV		CW		CX		CY		CZ		DA		DB		DC		DD		DE		DF		DG		DH		DI		DJ		DK		DL		DM		DN		DO		DP		DQ		DR		DS		DT		DU		DV		DW		DX		DY		DZ		EA		EB		EC		ED		EE		EF		EG		EH		EI		EJ		EK		EL		EM		EN		EO		EP		EQ		ER		ES		ET		EU		EV		EW		EX		EY		EZ		FA		FB		FC		FD		FE		FF		FG		FH		FI		FJ		FK		FL		FM		FN		FO		FP		FQ		FR		FS		FT		FU		FV		FW		FX		FY		FZ		GA		GB		GC		GD		GE		GF		GG		GH		GI		GJ		GK		GL		GM		GN		GO		GP		GQ		GR		GS		GT		GU		GV		GW		GX		GY		GZ		HA		HB		HC		HD		HE		HF		HG		HH		HI		HJ		HK		HL		HM		HN		HO		HP		HQ		HR		HS		HT		HU		HV		HW		HX		HY		HZ		IA		IB		IC		ID		IE		IF		IG		IH		II		IJ		IK		IL		IM		IN		IO		IP		IQ		IR		IS		IT		IU		IV		IW		IX		IY		IZ		JA		JB		JC		JD		JE		JF		JG		JH		JI		JJ		JK		JL		JM		JN		JO		JP		JQ		JR		JS		JT		JU		JV		JW		JX		JY		JZ		KA		KB		KC		KD		KE		KF		KG		KH		KI		KJ		KK		KL		KM		KN		KO		KP		KQ		KR		KS		KT		KU		KV		KW		KX		KY		KZ		LA		LB		LC		LD		LE		LF		LG		LH		LI		LJ		LK		LL		LM		LN		LO		LP		LQ		LR		LS		LT		LU		LV		LW		LX		LY		LZ		MA		MB		MC		MD		ME		MF		MG		MH		MI		MJ		MK		ML		MM		MN		MO		MP		MQ		MR		MS		MT		MU		MV		MW		MX		MY		MZ		NA		NB		NC		ND		NE		NF		NG		NH		NI		NJ		NK		NL		NM		NN		NO		NP		NQ		NR		NS		NT		NU		NV		NW		NX		NY		NZ		OA		OB		OC		OD		OE		OF		OG		OH		OI		OJ		OK		OL		OM		ON		OO		OP		OQ		OR		OS		OT		OU		OV		OW		OX		OY		OZ		PA		PB		PC		PD		PE		PF		PG		PH		PI		PJ		PK		PL		PM		PN		PO		PP		PQ		PR		PS		PT		PU		PV		PW		PX		PY		PZ		QA		QB		QC		QD		QE		QF		QG		QH		QI		QJ		QK		QL		QM		QN		QO		QP		QQ		QR		QS		QT		QU		QV		QW		QX		QY		QZ		RA		RB		RC		RD		RE		RF		RG		RH		RI		RJ		RK		RL		RM		RN		RO		RP		RQ		RR		RS		RT		RU		RV		RW		RX		RY		RZ		SA		SB		SC		SD		SE		SF		SG		SH		SI		SJ		SK		SL		SM		SN		SO		SP		SQ		SR		SS		ST		SU		SV		SW		SX		SY		SZ		TA		TB		TC		TD		TE		TF		TG		TH		TI		TJ		TK		TL		TM		TN		TO		TP		TQ		TR		TS		TT		TU		TV		TW		TX		TY		TZ		UA		UB		UC		UD		UE		UF		UG		UH		UI		UJ		UK		UL		UM		UN		UO		UP		UQ		UR		US		UT		UU		UV		UW		UX		UY		UZ		VA		VB		VC		VD		VE		VF		VG		VH		VI		VJ		VK		VL		VM		VN		VO		VP		VQ		VR		VS		VT		VU		VV		VW		VX		VY		VZ		WA		WB		WC		WD		WE		WF		WG		WH		WI		WJ		WK		WL		WM		WN		WO		WP		WQ		WR		WS		WT		WU		WV		WW		WX		WY		WZ		XA		XB		XC		XD		XE		XF		XG		XH		XI		XJ		XK		XL		XM		XN		XO		XP		XQ		XR		XS		XT		XU		XV		XW		XX		XY		XZ		YA		YB		YC		YD		YE		YF		YG		YH		YI		YJ		YK		YL		YM		YN		YO		YP		YQ		YR		YS		YT		YU		YV		YW		YX		YY		YZ		ZA		ZB		ZC		ZD		ZE		ZF		ZG		ZH		ZI		ZJ		ZK		ZL		ZM		ZN		ZO		ZP		ZQ		ZR		ZS		ZT		ZU		ZV		ZW		ZX		ZY		ZZ	
1165										1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80		81		82		83		84		85		86		87		88		89		90		91		92		93		94		95		96		97		98		99		100																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
TITLE: OUTER RODS										DRAWN BY: JOR		CHECKED BY:		G DATE: 11/06/21		APPROVED BY:		REVISION: Q		DWG. NO. 4320105-EN		PART NUMBER: 4320105		SIGNATURE & DATE: ROY 20140110		REVISION: 1		FIRST ISSUE		NO SCALE		NOTE:		1. REFERENCE STANDARD IEC-61284;		2. MATERIAL: ALUMINUM ALLOY;		3. DIA. OF INDIVIDUAL OUTER ROD 6.4mm, TOTAL 10 RODS;		4. APP. WEIGHT: 1.1kg;		5. TOLERANCE: DIMENSION ≤ 100mm, ± 3mm;		DIMENSION > 100mm, ± 4%.																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									

1 2 3 4 5 6 7 8

ALL DIMENSIONS IN MILLIMETERS

00055013-EN

0

09

203

Aluminium Alloy

NO SCALE

NOTE:

1. REFERENCE STANDARD IEC-61284;
2. MATERIAL OF BODY IS RUBBER WITH ALUMINUM ALLOY REINFORCEMENT INSIDE;
3. TOLERANCE: DIMENSION $\leq 50\text{mm}$, $\pm 2\text{mm}$;
DIMENSION $> 50\text{mm}$, $\pm 4\%$.

REVISION NO. FIRST ISSUE REVISION

Rev 20140110 SIGNATURE & DATE

TITLE: INSERT

PART NUMBER: 00055013

DWG. NO. 00055013-EN

REVISION NO. 1

DATE

DRAWN BY

CHECKED BY

DATE

APPROVED BY

REVISION

Technical drawing of a U-shaped metal strap. The drawing includes two views: a side view and a top view.

Side View Dimensions:

- Total width: 116
- Bottom flange width: 22.5
- Bottom flange thickness: 4
- Radius of the bottom flange: $\phi 68$

Top View Dimensions:

- Width: 44
- Hole diameter: $\phi 17.5$

NOTE:

1. REFERENCE STANDARD IEC-61284;
2. MATERIAL OF BODY IS ALUMINUM ALLOY;
3. TOLERANCE: DIMENSION $\leq 50\text{mm}$, $\pm 2\text{mm}$; DIMENSION $> 50\text{mm}$, $\pm 4\%$.

NO SCALE



ALL DIMENSIONS IN MILLIMETERS										I		Z		3		4		3		0		I		0		00064963-EN	
A																											
B																											
C																											
D																											
E																											
E																											
F																											

Ø14

152

NOTE:


- 1. Body material: Aluminum alloy;
- 2. Fit for OPGW diameter range: 11.7-12.9mm, This product is installed on the outside of SSR of suspension;
- 3. Short Time Current Capacity is 150KA²S.


NO SCALE




REVISION	1	2	3	4	5	6	7	8
DATE								
SIGNATURE								
REVISION								
DATE								
SIGNATURE								

TITLE				CURRENT TRANS TAB				DRAWN BY				CHECKED BY				DATE				APPROVED BY				REVISION			
PART NUMBER				00064963																				00064963-EN			
DWG. NO.																											

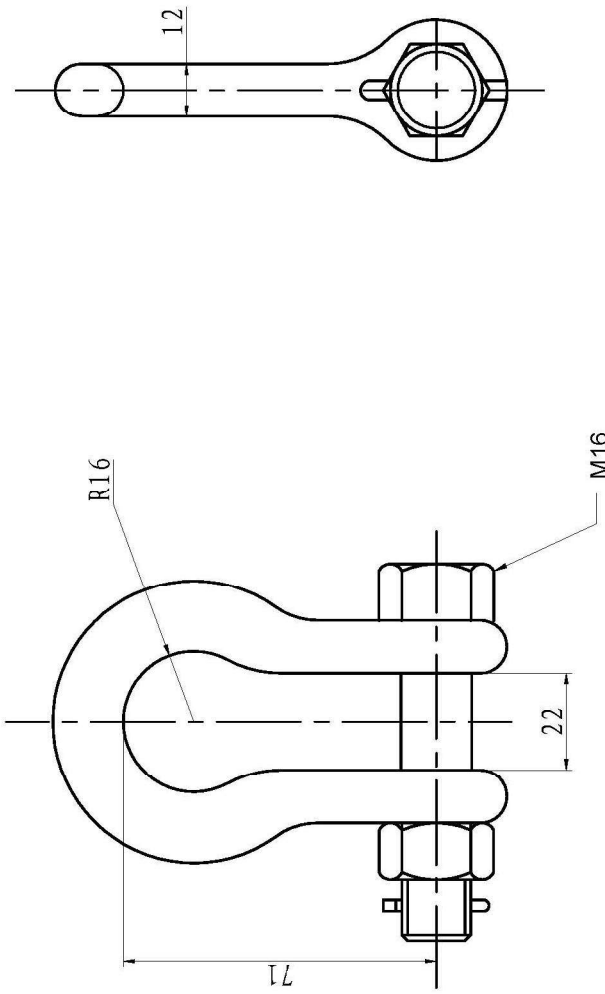

1		2		3		4		5		6		7		8	
ALL DIMENSIONS IN MILLIMETERS															
AS-7-SS-EN															
<div></div>															
<p>NOTE: 1. BODY MATERIAL: GAL. STEEL; BOLT, NUT & COTTER PIN MATERIAL: STAINLESS STEEL. 2. THE ULTIMATE BREAK STRENGTH IS 70KN. 3. WEIGHT: 0.5kg. 4. DIMENSION TOLERANCE: $<50\text{mm} \pm 2\text{mm}$, $\geq 50\text{mm} \pm 4\%$.</p>															
NO SCALE															
U SHACKLE															
AS-7-SS															
DRAWN BY: [] CHECKED BY: [] DATE: []															
APPROVED BY: []															
REVISION: []															
DRAWING NO. AS-7-SS-EN															



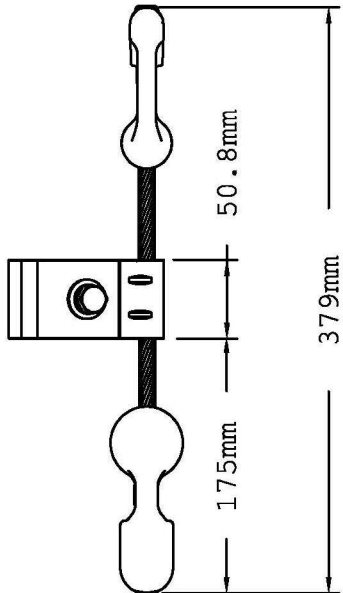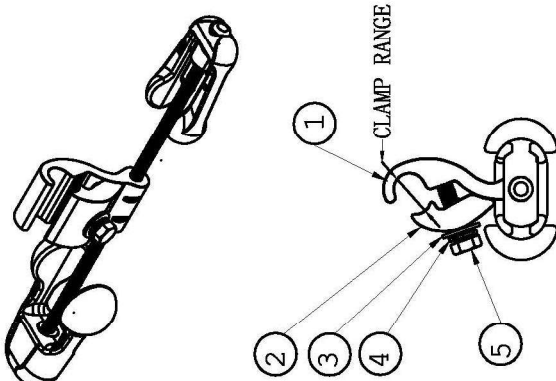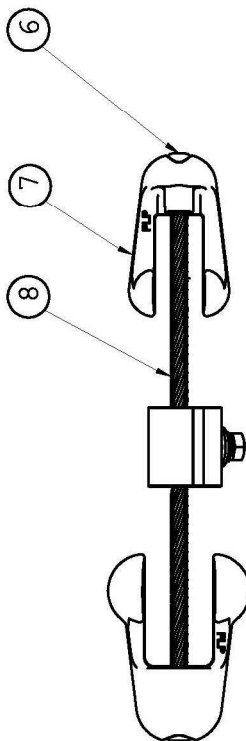ALL DIMENSIONS IN MILLIMETERS																																																						
<div><div></div><div><p>NOTES:</p><ol style="list-style-type: none">1. STANDER REFER TO IEC 61897.2. OPGW DIA. IS 11.7mm, UTS IS 63.5/50 kN.3. FERROUS COMPONENTS GALVANIZED TO IEC/ISO/ASTM STANDARD.4. APPROX. ASSEMBLED WEIGHT: 1.8 kg.5. CLAMP RANGE: 15.5-20.0mm.6. TOLERANCE: DIMENSIONS ±3mm; DIMENSIONS ±4%.</div></div>																																																						
<div><div><table border="1"><thead><tr><th>SYM</th><th>DESCRIPTION</th><th>QTY</th><th>MATERIAL</th><th>MATERIAL CODE</th></tr></thead><tbody><tr><td>8</td><td>MESSENGER</td><td>1</td><td>GALVANIZED STEEL</td><td></td></tr><tr><td>7</td><td>WEIGHT</td><td>2</td><td>GALVANIZED IRON</td><td>ASTM 65-45-12</td></tr><tr><td>6</td><td>COLLET</td><td>2</td><td>ALUMINUM ALLOY</td><td></td></tr><tr><td>5</td><td>HEX BOLT - M10 x 50</td><td>1</td><td>GALVANIZED STEEL</td><td></td></tr><tr><td>4</td><td>LOCK WASHER</td><td>1</td><td>GALVANIZED STEEL</td><td></td></tr><tr><td>3</td><td>WASHER</td><td>1</td><td>GALVANIZED STEEL</td><td></td></tr><tr><td>2</td><td>KEEPER</td><td>1</td><td>ALUMINUM ALLOY</td><td>ASTM-A6063</td></tr><tr><td>1</td><td>CLAMP</td><td>1</td><td>ALUMINUM ALLOY</td><td>ASTM-A6063</td></tr></tbody></table></div><div><p>NO SCALE</p></div></div>										SYM	DESCRIPTION	QTY	MATERIAL	MATERIAL CODE	8	MESSENGER	1	GALVANIZED STEEL		7	WEIGHT	2	GALVANIZED IRON	ASTM 65-45-12	6	COLLET	2	ALUMINUM ALLOY		5	HEX BOLT - M10 x 50	1	GALVANIZED STEEL		4	LOCK WASHER	1	GALVANIZED STEEL		3	WASHER	1	GALVANIZED STEEL		2	KEEPER	1	ALUMINUM ALLOY	ASTM-A6063	1	CLAMP	1	ALUMINUM ALLOY	ASTM-A6063
SYM	DESCRIPTION	QTY	MATERIAL	MATERIAL CODE																																																		
8	MESSENGER	1	GALVANIZED STEEL																																																			
7	WEIGHT	2	GALVANIZED IRON	ASTM 65-45-12																																																		
6	COLLET	2	ALUMINUM ALLOY																																																			
5	HEX BOLT - M10 x 50	1	GALVANIZED STEEL																																																			
4	LOCK WASHER	1	GALVANIZED STEEL																																																			
3	WASHER	1	GALVANIZED STEEL																																																			
2	KEEPER	1	ALUMINUM ALLOY	ASTM-A6063																																																		
1	CLAMP	1	ALUMINUM ALLOY	ASTM-A6063																																																		
<div><div><p>TITLE: VORTX™ STOCKBRIDGE DAMPER FOR CONDUCTOR & SHIELD WIRE (OPGW/OHGW)</p><p>PART NUMBER: VSD-2020</p></div><div><p>DRAWN BY: [] CHECKED BY: [] DATE: [] APPROVED BY: [] REVISION: []</p></div><div><p>DWG. NO. VSD-2020-EN</p></div></div>																																																						
1	2	3	4	5	6	7	8																																															



1		2		3		4		5		6		7		8	
ALL DIMENSIONS IN MILLIMETERS															
REPAIR RODS FOR OPGW															
A															
B															
C															
D															
E															
F															

COLOR CODE (GREEN)

SUBSETS

1370

NOTE:

- General standard according to IEC 61284;
- Material: Aluminium-Clad. Steel;
- Rod Dia. is 3.6mm.;
- Weight: 1.1kg;
- Just for right hand lay outer layer OPGW(11.7-12.8mm).

NO SCALE

TITLE: REPAIR RODS FOR OPGW (LHL)		DRAWN BY		CHECKED BY		DATE		APPROVED BY		REVISION	
PART NUMBER: 3600103										a	

1		2		3		4		5		6		7		8	
REVISION		FIRST ISSUE		SIGNATURE & DATE		SIGNATURE & DATE		SIGNATURE & DATE		SIGNATURE & DATE		SIGNATURE & DATE		SIGNATURE & DATE	